



### 1.85mm-1.85mm adapters(DC~65GHz)


#### Specifications

Impedance: 50Ω
Frequency: DC-65GHz
Durability: 500 cycles
Temperature Range: -55°C~+165°C


#### Material/Finishing

Housing: Stainless Steel SU303	Polished/Passivated
Center contact: Beryllium Copper	Gold plated(MIL-G-45204)
Insulators: PEI	


#### 1.85mm Interfaces PER IEC-61169

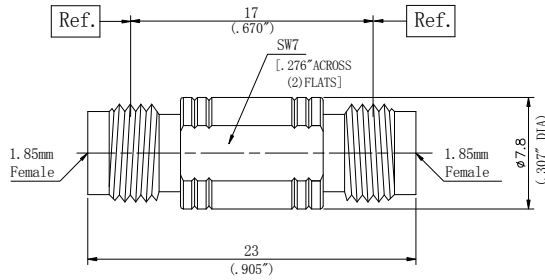

Description	1.85mm (f) to 1.85mm (f)
PN	Z383800Z01
VSWR	DC-65GHz . . .1.25:1 (max)

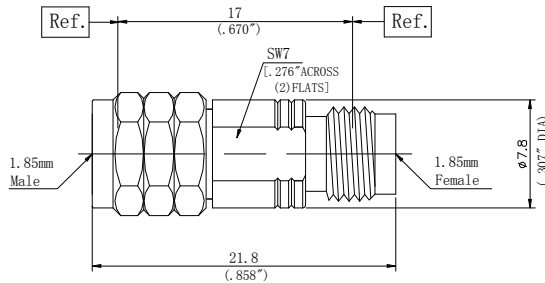

Description	1.85mm (m) to 1.85mm (f)
PN	Z383810Z01
VSWR	DC-65GHz . . .1.25:1 (max)

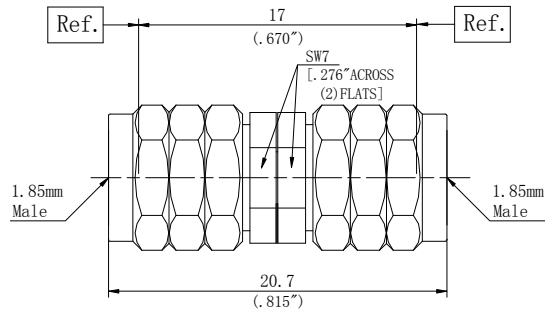

Description	1.85mm (m) to 1.85mm (m)
PN	Z383811Z01
VSWR	DC-65GHz . . .1.25:1 (max)