



2.4mm-1.85mm adapters(DC~50GHz)


Specifications

Impedance:	50Ω
Frequency:	DC-50GHz
Durability:	500 cycles
Temperature Range:	-55°C~+165°C


Material/Finishing

Housing:	Stainless Steel SU303	Polished/Passivated
Center contact:	Beryllium Copper	Gold plated(MIL-G-45204)
Insulators:	PEI	


2.4mm interfaces PER IEEE STD 287-2007 1.85mm interfaces PER IEC-61169

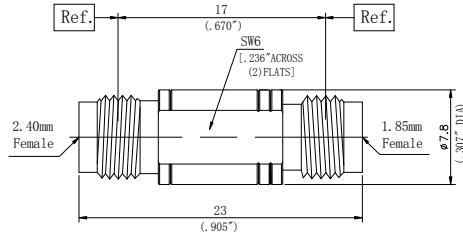


Description	2.4mm (f) to 1.85mm (f)
PN	Z373800Z01
VSWR	DC-50GHz . . .1.25:1 (max)

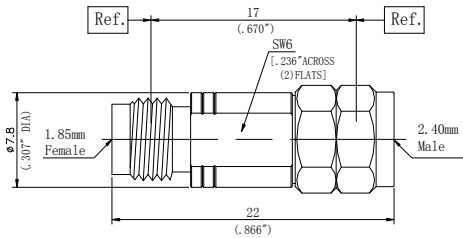

Description	2.4mm (m) to 1.85mm (f)
PN	Z373810Z01
VSWR	DC-50GHz . . .1.25:1 (max)

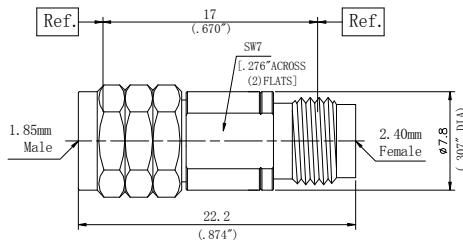

Description	2.4mm (f) to 1.85mm (m)
PN	Z373801Z01
VSWR	DC-50GHz . . .1.25:1 (max)

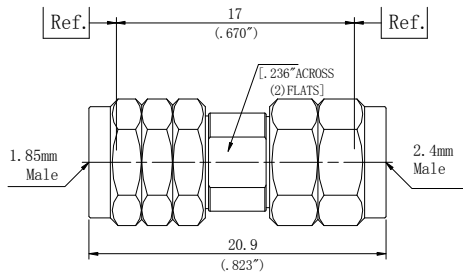

Description	2.4mm (m) to 1.85mm (m)
PN	Z373811Z01
VSWR	DC-50GHz . . .1.25:1 (max)