



2.4mm-2.4mm adapters(DC~50GHz)



Specifications

Impedance: 50Ω
Frequency: DC-50GHz
Durability: 500 cycles
Temperature Range: -55°C~+165°C


Material/Finishing

Housing: Stainless Steel SU303	Polished/Passivated
Center contact: Beryllium Copper	Gold plated(MIL-G-45204)
Insulators: PEI	


2.4mm Interfaces PER IEEE STD 287-2007

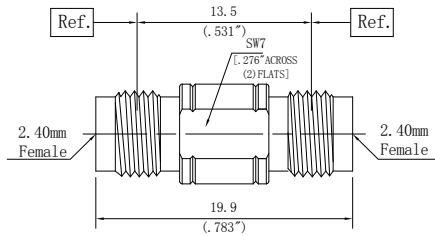



Description	2.4mm (f) to 2.4mm (f)
PN	Z373700Z01
VSWR	DC-50GHz . . . 1.20:1 (max)

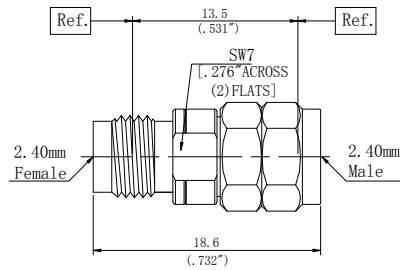

Description	2.4mm (m) to 2.4mm (f)
PN	Z373710Z01
VSWR	DC-50GHz . . . 1.15:1 (max)

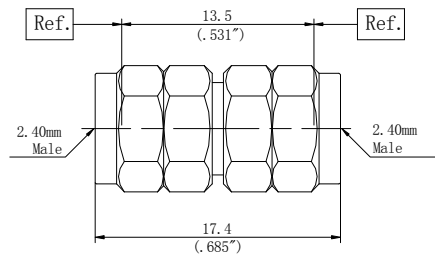

Description	2.4mm (m) to 2.4mm (m)
PN	Z373711Z01
VSWR	DC-50GHz . . . 1.15:1 (max)

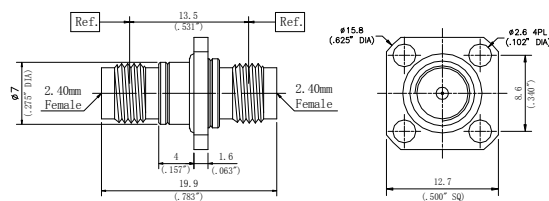

Description	2.4mm (f) to 2.4mm (f)
PN	Z373700FS01
VSWR	DC-50GHz . . . 1.20:1 (max)