





2.92mm-2.4mm adapters(DC~40GHz)

Specifications


Impedance:	50Ω
Frequency:	DC-40GHz
Durability:	500 cycles
Temperature Range:	-55°C~+165°C

Material/Finishing


Housing:	Stainless Steel SU303	Polished/Passivated
Center contact:	Beryllium Copper	Gold plated(MIL-G-45204)
Insulators:	PEI	
2.92mm interfaces PER MIL-STD-348A		2.4mm interfaces PER IEEE STD 287-2007

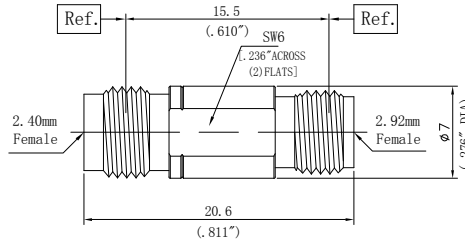


Description	2.92mm (f) to 2.4mm (f)
PN	Z363700Z01
VSWR	DC-40GHz . . . 1.20:1 (max)

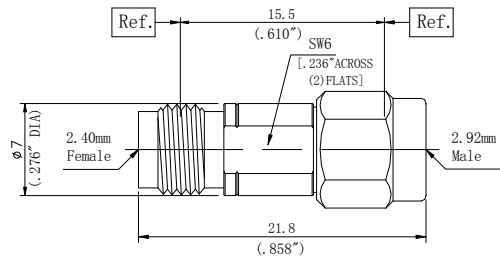


Description	2.92mm (m) to 2.4mm (f)
PN	Z363710Z01
VSWR	DC-40GHz . . . 1.15:1 (max)

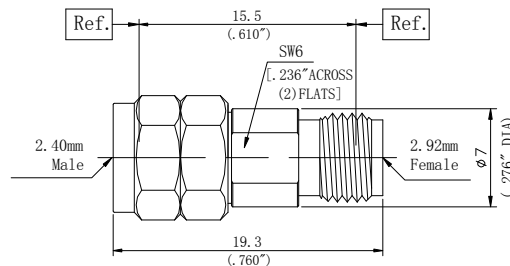

Description	2.92mm (f) to 2.4mm (m)
PN	Z363701Z01
VSWR	DC-40GHz . . . 1.15:1 (max)

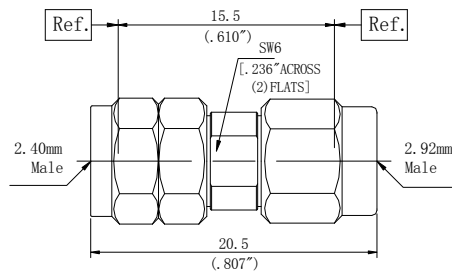

Description	2.92mm (m) to 2.4mm (m)
PN	Z363711Z01
VSWR	DC-40GHz . . . 1.15:1 (max)

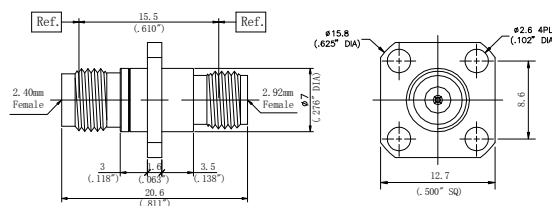

Description	2.92mm (m) to 2.4mm (m)
PN	Z363700F01
VSWR	DC-40GHz . . . 1.20:1 (max)