



## 2.92mm-2.92mm adapters(DC~40GHz)


### Specifications

Impedance: 50Ω
Frequency: DC-40GHz
Durability: 500 cycles
Temperature Range: -55°C~+165°C


### Material/Finishing

Housing: Stainless Steel SU303	Polished/Passivated
Center contact: Beryllium Copper	Gold plated(MIL-G-45204)
Insulators: PEI	


### 2.92mm Interfaces PER MIL-STD-348A

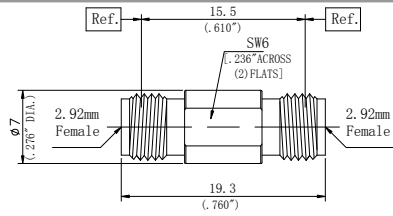


Description	2.92mm (f) to 2.92mm (f)
PN	Z363600Z01
VSWR	DC-40GHz . . . 1.20:1 (max)

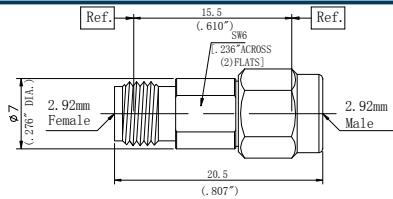



Description	2.92mm (m) to 2.92mm (f)
PN	Z363610Z01
VSWR	DC-40GHz . . . 1.15:1 (max)

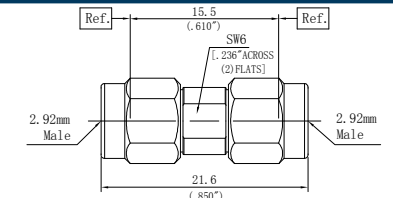



Description	2.92mm (m) to 2.92mm (m)
PN	Z363611Z01
VSWR	DC-40GHz . . . 1.15:1 (max)

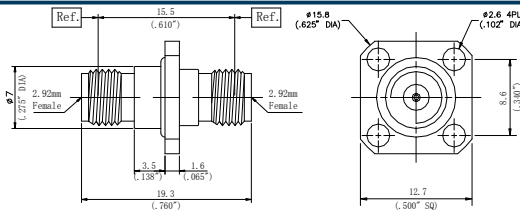



Description	2.92mm (f) to 2.92mm (f)
PN	Z363600FS01
VSWR	DC-40GHz . . . 1.20:1 (max)

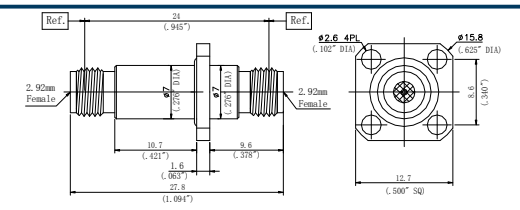

Description	2.92mm (f) to 2.92mm (f)
PN	Z363600FS01A
VSWR	DC-40GHz . . . 1.20:1 (max)

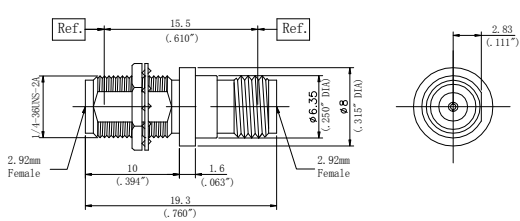

Description	2.92mm (f) to 2.92mm (f)
PN	Z363600Y01
VSWR	DC-40GHz . . . 1.20:1 (max)

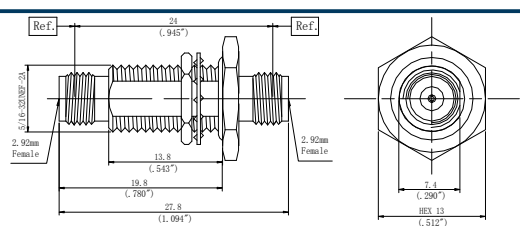

Description	2.92mm (f) to 2.92mm (f)
PN	Z363600YS02
VSWR	DC-40GHz . . . 1.20:1 (max)