



### 3.5mm-2.4mm adapters(DC~33GHz)



**Specifications**

Impedance: 50Ω
Frequency: DC-33GHz
Durability: 500 cycles
Temperature Range: -55°C~+165°C


**Material/Finishing**

Housing: Stainless Steel SU303	Polished/Passivated
Center contact: Beryllium Copper	Gold plated(MIL-G-45204)
Insulators: PEI	


**3.5mm Interfaces PER IEC-60169 2.4mm Interfaces PER IEEE STD 287-2007**

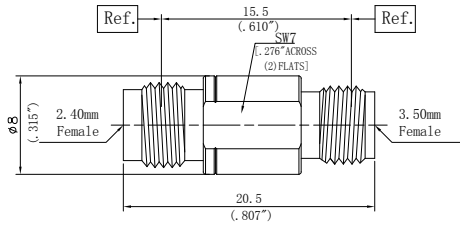


Description	3.5mm (f) to 2.4mm (f)
PN	Z353700Z01
VSWR	DC-33GHz . . .1.15:1 (max)

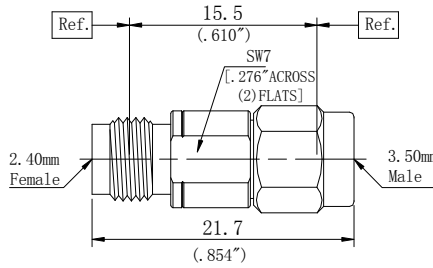

Description	3.5mm (m) to 2.4mm (f)
PN	Z353710Z01
VSWR	DC-33GHz . . .1.15:1 (max)

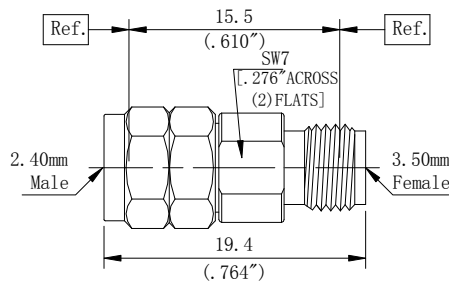

Description	3.5mm (f) to 2.4mm (m)
PN	Z353701Z01
VSWR	DC-33GHz . . .1.15:1 (max)

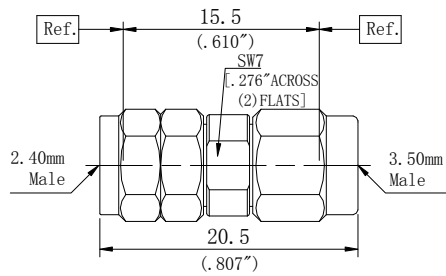

Description	3.5mm (m) to 2.4mm (m)
PN	Z353711Z01
VSWR	DC-33GHz . . .1.15:1 (max)