




3.5mm-2.92mm adapters(DC~33GHz)

Specifications


Impedance: 50Ω
Frequency: DC-33GHz
Durability: 500 cycles
Temperature Range: -55°C~+165°C

Material/Finishing


Housing: Stainless Steel SU303	Polished/Passivated
Center contact: Beryllium Copper	Gold plated(MIL-G-45204)
Insulators: PEI	
3.5mm Interfaces PER IEC-60169	2.92mm Interfaces PER MIL-STD-348A




Description	3.5mm (f) to 2.92mm (f)
PN	Z353600Z01
VSWR	DC-33GHz . . . 1.15:1 (max)

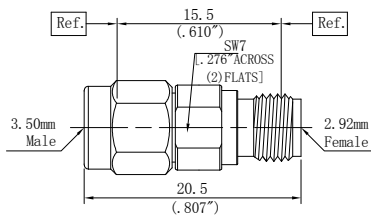



Description	3.5mm (m) to 2.92mm (f)
PN	Z353610Z01
VSWR	DC-33GHz . . . 1.15:1 (max)

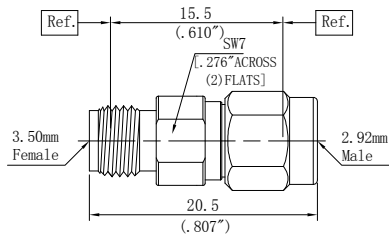

Description	3.5mm (f) to 2.92mm (m)
PN	Z353601Z01
VSWR	DC-33GHz . . . 1.15:1 (max)

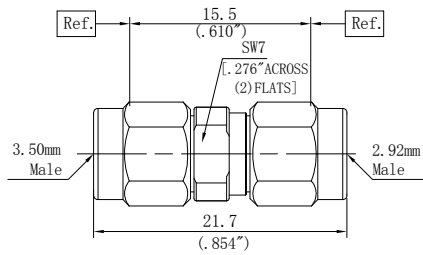

Description	3.5mm (m) to 2.92mm (m)
PN	Z353611Z01
VSWR	DC-33GHz . . . 1.15:1 (max)

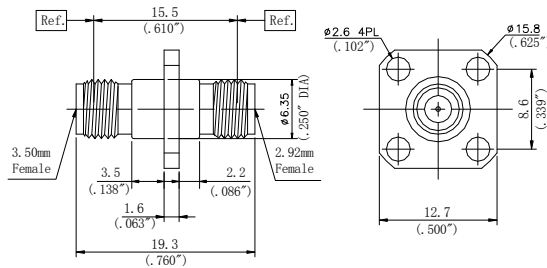

Description	3.5mm (f) to 2.92mm (f)
PN	Z353600F01
VSWR	DC-33GHz . . . 1.15:1 (max)