



3.5mm-3.5mm adapters(DC~33GHz)


Specifications

Impedance: 50Ω
Frequency: DC-33GHz
Durability: 500 cycles
Temperature Range: -55°C~+165°C


Material/Finishing

Housing: Stainless Steel SU303	Polished/Passivated
Center contact: Beryllium Copper	Gold plated(MIL-G-45204)
Insulators: PEI	


3.5mm Interfaces PRE IEC-60169

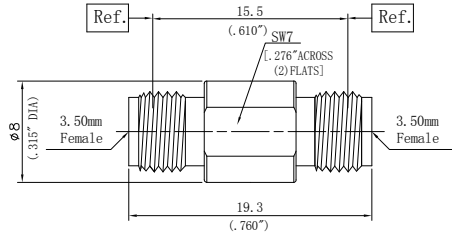


Description	3.5mm (f) to 3.5mm (f)
PN	Z353500Z01
VSWR	DC-33GHz ... 1.15:1 (max)

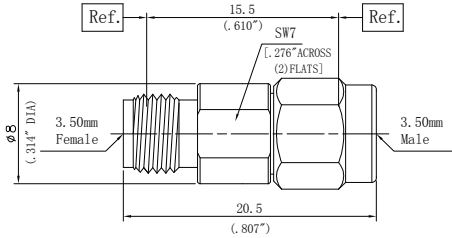

Description	3.5mm (m) to 3.5mm (f)
PN	Z353510Z01
VSWR	DC-33GHz ... 1.15:1 (max)

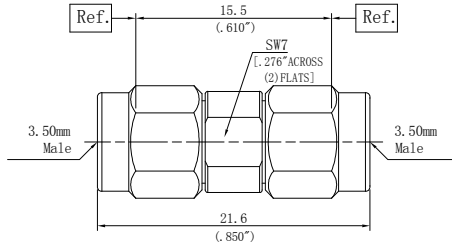

Description	3.5mm (m) to 3.5mm (m)
PN	Z353511Z01
VSWR	DC-33GHz ... 1.15:1 (max)

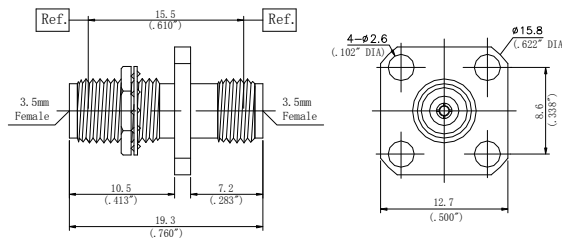

Description	3.5mm (f) to 3.5mm (f)
PN	Z353500FY01
VSWR	DC-33GHz ... 1.15:1 (max)