




3.5mm-SMA adapters(DC~27GHz)

Specifications


Impedance: 50Ω
Frequency: DC-27GHz
Durability: 500 cycles
Temperature Range: -55°C~+165°C

Material/Finishing


Housing: Stainless Steel SU303	Polished/Passivated
Center contact: Beryllium Copper	Gold plated(MIL-G-45204)
Insulators: PEI	
3.5mm Interfaces PER IEC-60169	SMA Interfaces PER MIL-STD-348A

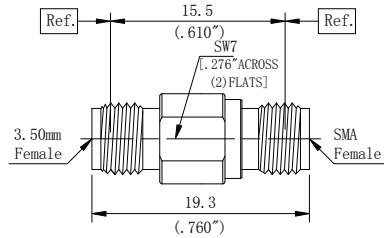


Description	3.5mm (f) to SMA (f)
PN	Z355500Z01
VSWR	DC-27GHz . . .1.15:1 (max)

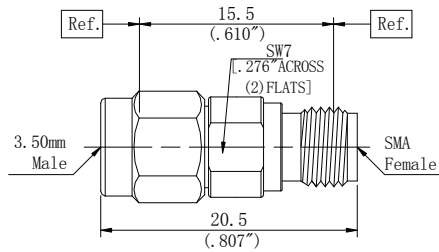

Description	3.5mm (m) to SMA (f)
PN	Z355510Z01
VSWR	DC-27GHz . . .1.15:1 (max)

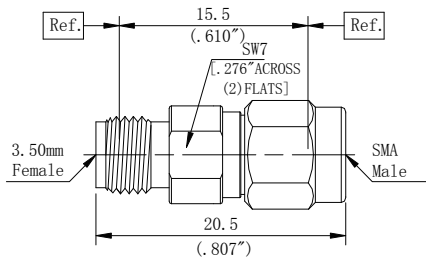

Description	3.5mm (f) to SMA (m)
PN	Z355501Z01
VSWR	DC-27GHz . . .1.15:1 (max)

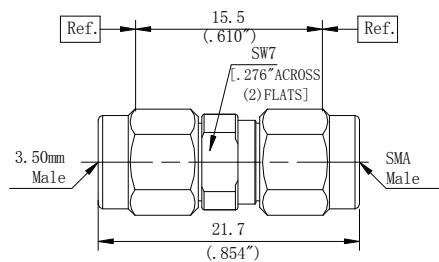

Description	3.5mm (m) to SMA (m)
PN	Z355511Z01
VSWR	DC-27GHz . . .1.15:1 (max)