



□ 3.5mm–3.5mm DC block (5MHz~26.5GHz)

Specifications

Impedance: 50Ω

Frequency: 5MHz~26.5GHz

Durability: 500 Cycles

Temperature Range: -55°C~+165°C

Material/Finishing


Housing: Stainless Steel SU303 Polished/Passivated

Center Contact: Beryllium Copper

Gold plated PER MIL-G-45204

Insulators: PEI

3.5mm Interface IEC-60169

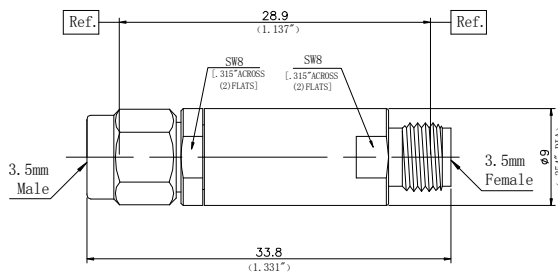

discription 3.5mm (f) to 3.5mm (f)	
PN	GZ3501-01
VSWR	5MHz~26.5GHz . . 1.30:1 (max)