

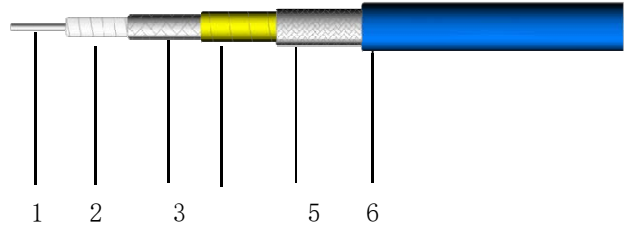
FSA-460P/N **9901****High Performance Low Loss Coax Cable**

Ver B Release Date May, 2017

Features&Benefits

- 76%Vp PTFE Tape+SPC Ribbon+Tri-Sheild
- Low Loss, Better bending performance,Durable
- Equivalent to SFT-142
- Replace to HP160s, UFA147A,LL160

SUCOFLEX-102, 32022

**Construction Specification**

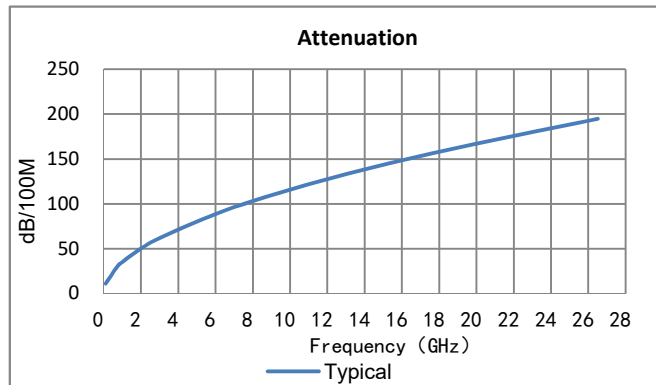
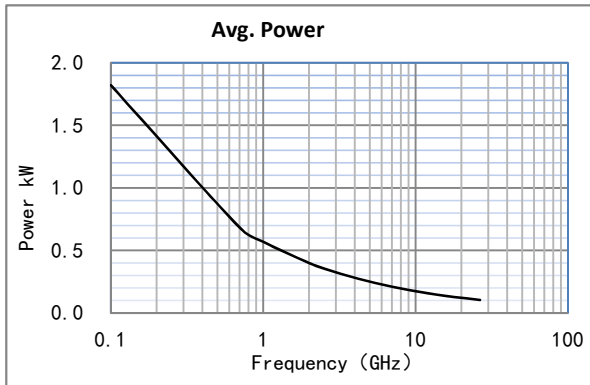
	Description	Size (mm)	Materials
1	Center conductor	1.02	Silver Plated Copper
2	Dielectric	3.05	LD PTFE
3	Outer conductor	3.25	Silver Plated Copper Ribbon
4	Innerlayer	3.43	Aluminum Laminate
5	Outer sheild	3.85	Silver Plated Copper
6	Jacket	4.50	Blue FEP

Mechanical&Environmental Specifications

Bend Radius:installation (mm)	20
Bend Radius:repeated (mm)	46
Weight (g/m)	50
Temp, Operating&Installation (°C)	-55~200
Temp, Storage (°C)	-65~200

Electrical Specifications

Operation Frequency (GHz)	26.5
Impedance (Ohms)	50
Velocity of Propagation	76%
Shielding Effectiveness (dB)	100
Voltage Withstand (V,DC)	1000

**Attenuation (Typical@25°C&VSWR=1.0) &Power (VSWR=1.0;40°C;Sea Level)**

Frequency MHz	100	700	1000	2000	3000	6000	8000	10000	12400	18000	26500
dB/100 m	11.1	29.5	35.4	50.4	62.0	88.8	103.2	116.0	129.9	158.3	194.9
Avg.Power kW	1.821	0.682	0.569	0.400	0.324	0.227	0.195	0.174	0.155	0.127	0.103

K1= 1.0994853

K2= 0.0006019

Calculate Attenuation = $K1 * \sqrt{FMHz} + K2 * FMHz$

PROPRIETARY INFORMATION: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM MICROWAVETOWN

Microwave Town Company LLC.

Website: www.microwavetown.com