

FSD-141-TM

P/N 9608




High Performance Low Loss Semi-Rigid Coax Cable

Ver A Release Date Jan, 2013

Features&Benefits

- LD-PTDE Tape Wrapping Core
- Ultra Low Loss, Excellent size stable vs. temp
- Equivalent to CLL-50141
- Replace to UT-141-LL

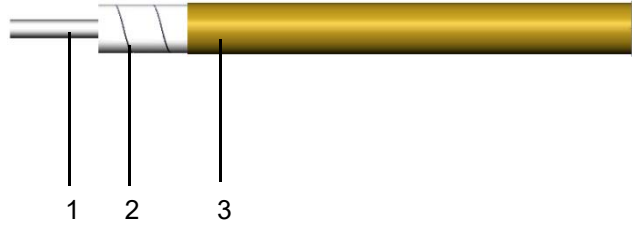

Construction Specification



	Description	Size (mm)	Materials
1	Center conductor	0.99	SPC
2	Dielectric	3.00	LD PTFE
3	Outer conductor	3.58	Seamless Copper Tube Tri-Metal Plating

Mechanical&Environmental Specifications

Bend Radius:installation (mm)	12.5
Bend Radius:repeated (mm)	N/A
Weight (g/m)	43
Temp, Operating&Installation (°C)	-60~250
Temp, Storage (°C)	-65~250

Electrical Specifications

Operation Frequency (GHz)	26.5
Impedance (Ohms)	50
Velocity of Propagation	76%
Shielding Effectiveness (dB)	165
Voltage Withstand (V,DC)	1300

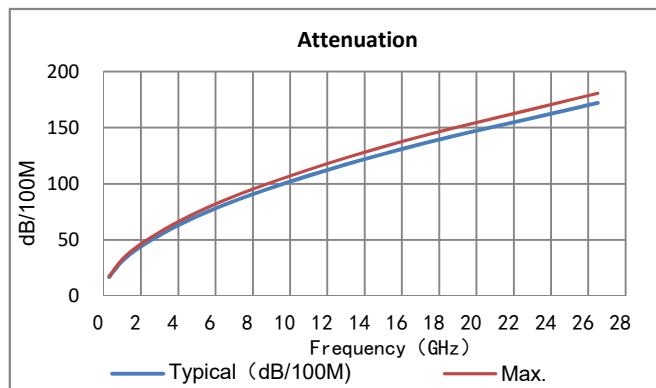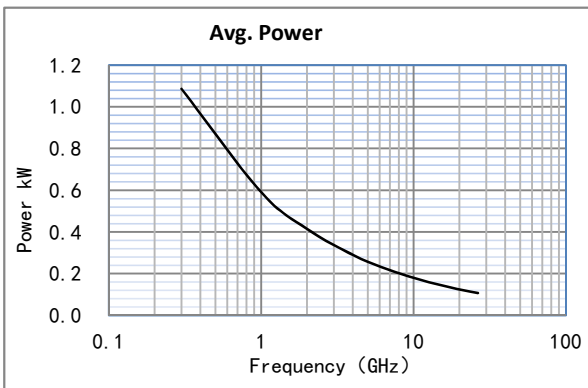

Attenuation (Typical@25°C&VSWR=1.0) &Power (VSWR=1.0;40°C;Sea Level)

Frequency MHz	300	1000	2000	4000	6000	8000	10000	12000	14000	16000	18000	26500
dB/100 m	16.8	31.0	44.2	63.1	78.0	90.7	102.0	112.4	122.0	131.0	139.6	172.1
Avg.Power kW	1.086	0.590	0.414	0.289	0.234	0.201	0.179	0.163	0.150	0.139	0.131	0.106
	K1= 0.9610400					K2= 0.0005904						

$$\text{Calculate Attenuation} = K1 * \sqrt{FMHz} + K2 * FMHz$$

PROPRIETARY INFORMATION: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM MICROWAVETOWN

Microwave Town Company LLC.
Website: www.microwavetown.com