

# MTPA 2.5 - 7.5 GHz Wideband Solid-State Power Amplifiers



## STANDARD MODELS

Model	Frequency Range GHz	Output Power min / max / typ W	Input Power max dBm	Small Signal Gain min / typ dB	Gain Flatness typ / max dB	Gain Adj max dB	Input VSWR typ / max
MTPA 2P57P5-50	2.5 - 7.5	50 / 55/ 52	0	48/52	±4/±4.5	20	1.5/2
Model	Output VSWR typ / max	2nd Harmonic Power @ Pout typ / max dBc	3rd Harmonic Power@ Pout max dBc	Spur @ Pout typ / max dBc	IM3 typ / max dBc	Noise Floor typ / max dBm/MHz	Stability yes / no
MTPA 2P57P5-50	2.5/3	-15/-10	-10	-65/-60	27/23	-45/40	Y
Model	VSWR Load	Line Power VA	Dimensions (H, D) 19"-System	Weight typ kg			
MTPA 2P57P5-50	3	800	3HU,19"	23			

1 HU = 44.45 mm

## STANDARD SPECIFICATIONS

Overdrive Protection: up to +10 dBm for no damage  
 Input Impedance: 50 Ohm nominal  
 Output Impedance: 50 Ohm nominal  
 Noise Figure: 20 dB max.  
 Class of Operation: AB-linear

## GENERAL

RF Input: N-f; standard on front panel  
 RF Output: N-f; standard on front panel  
 Mains Supply: <800 VA 200 ... 240 V AC  
 Power Meter: via status display  
 Elapsed Time Meter: via status display  
 Ambient Temperature: 0 ... +45 °C  
 Storage Temperature: -20 ... +65 °C


# MTPA 2.5 - 7.5 GHz Wideband Solid-State Power Amplifiers



Relative Humidity: up to 95% (non-condensing)  
Operating Altitude: up to 2000 m above sea level  
Vibration and Shock: normal laboratory environment  
Cooling: forced air with integral blower  
air intake and exhaust at rear

## OPTIONS

- A) Forward & Reverse Monitor
- B) External Dual Directional Coupler
- C) IEEE-488.2 GPIB Remote Control
- G) Output isolation
- L) LAN Remote control
- M) 115 V AC / 47 ... 63 Hz
- N) Harmonic Filter
- R) RS-232C Remote Control
- U) USB Remote Control

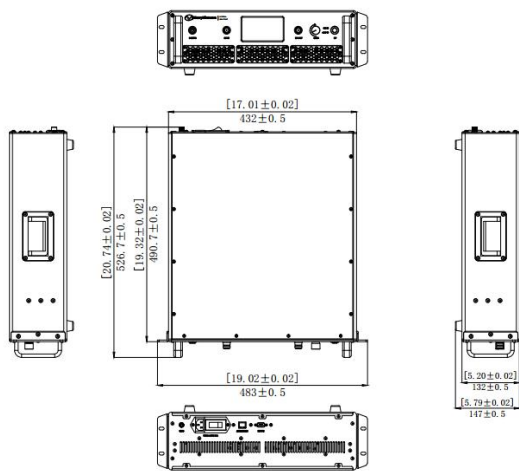

3HU

