



N-N adapters(DC~18GHz)

Specifications

Impedance: 50Ω

Frequency: DC-18GHz

Durability: 500 cycles

Temperature Range: -55°C~+165°C



Material/Finishing

Housing: Stainless Steel SU303 Polished/Passivated


Center contact: Beryllium Copper Gold plated (MIL-G-45204)

Insulators: PEI



N Interfaces PER MIL-STD-348A

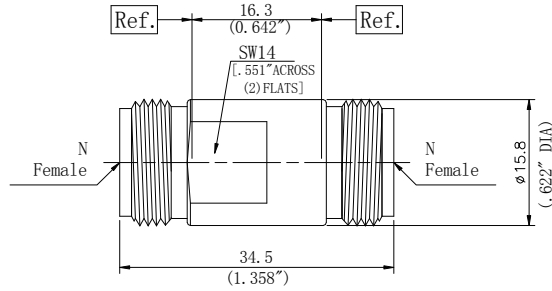


Description	N (f) to N (f)
PN	Z343400Z01
VSWR	DC-18GHz . . . 1.15:1 (max)

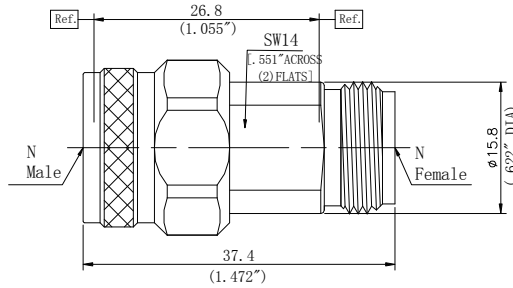


Description	N (m) to N (f)
PN	Z343410Z01
VSWR	DC-18GHz . . . 1.15:1 (max)

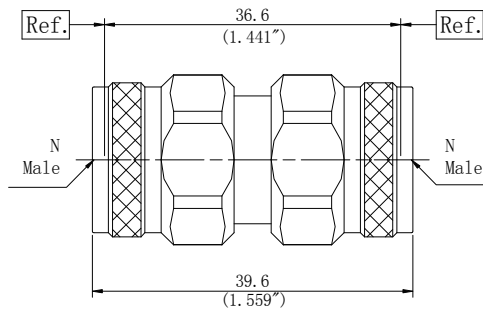

Description	N (m) to N (m)
PN	Z343411Z01
VSWR	DC-18GHz . . . 1.15:1 (max)

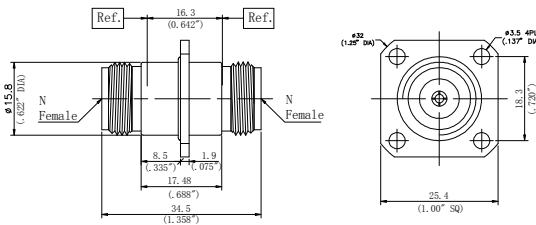

Description	N (f) to N (f)
PN	Z343400FS10
VSWR	DC-18GHz . . . 1.15:1 (max)

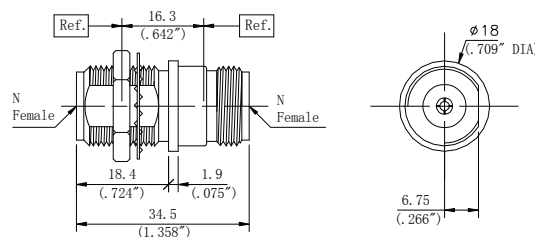

Description	N (f) to N (f)
PN	Z343400Y01
VSWR	DC-18GHz . . . 1.15:1 (max)