





TNC-TNC adapters(DC~11GHz)

Specifications


Impedance: 50Ω
Frequency: DC-11GHz
Durability: 500 cycles
Temperature Range: -55°C~+165°C

Material/Finishing


Housing: Stainless Steel SU303	polished/passivated
Center contact: Beryllium Copper	gold plated (MIL-G-45204)
Insulators: PEI&PTFE	
TNC interfaces PER MIL-STD-348A	

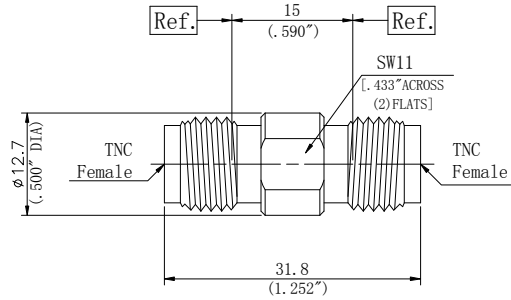

Description	TNC (f) to TNC (f)
PN	Z535300Z01
VSWR	DC-11GHz . . .1.15:1 (max)

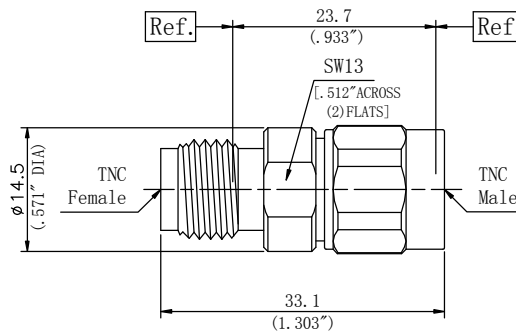

Description	TNC (m) to TNC (f)
PN	Z535310Z01
VSWR	DC-11GHz . . .1.15:1 (max)

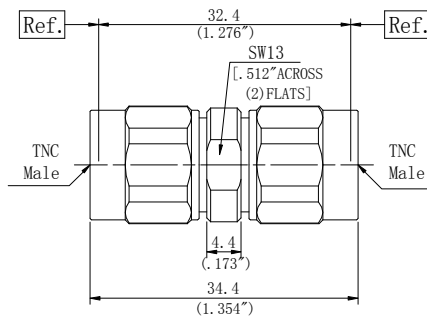

Description	TNC (m) to TNC (m)
PN	Z535311Z01
VSWR	DC-11GHz . . .1.15:1 (max)