



TNCA-SMA adapters(DC~18GHz)


Specifications

Impedance: 50Ω
Frequency: DC-18GHz
Durability: 500 cycles
Temperature Range: -55°C~+165°C


Material/Finishing

Housing: Stainless Steel SU303	Polished/Passivated
Center contact: Beryllium Copper	Gold plated(MIL-G-45204)
Insulators: PEI	


TNCA/SMA interfaces PER MIL-STD-348A

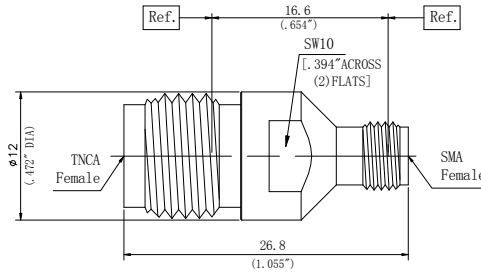


Description	TNCA (f) to SMA (f)
PN	Z545500Z01
VSWR	DC-18GHz . . .1.15:1 (max)

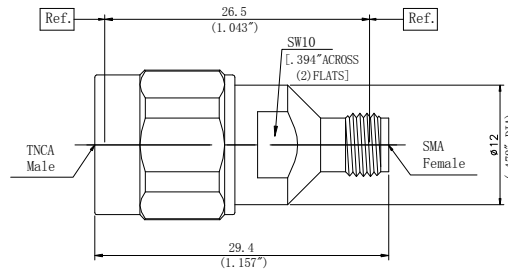

Description	TNCA (m) to SMA (f)
PN	Z545510Z01
VSWR	DC-18GHz . . .1.15:1 (max)

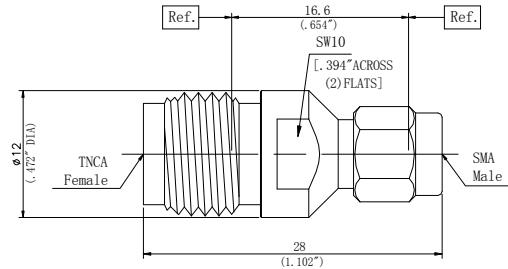

Description	TNCA (f) to SMA (m)
PN	Z545501Z01
VSWR	DC-18GHz . . .1.15:1 (max)

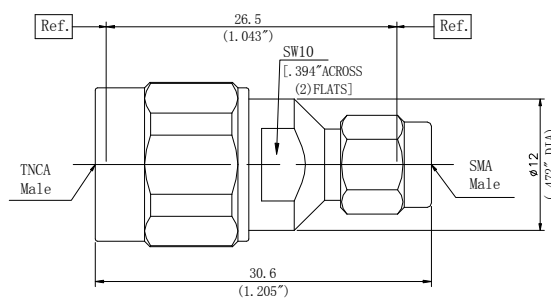

Description	TNCA (m) to SMA (m)
PN	Z545511Z01
VSWR	DC-18GHz . . .1.15:1 (max)