


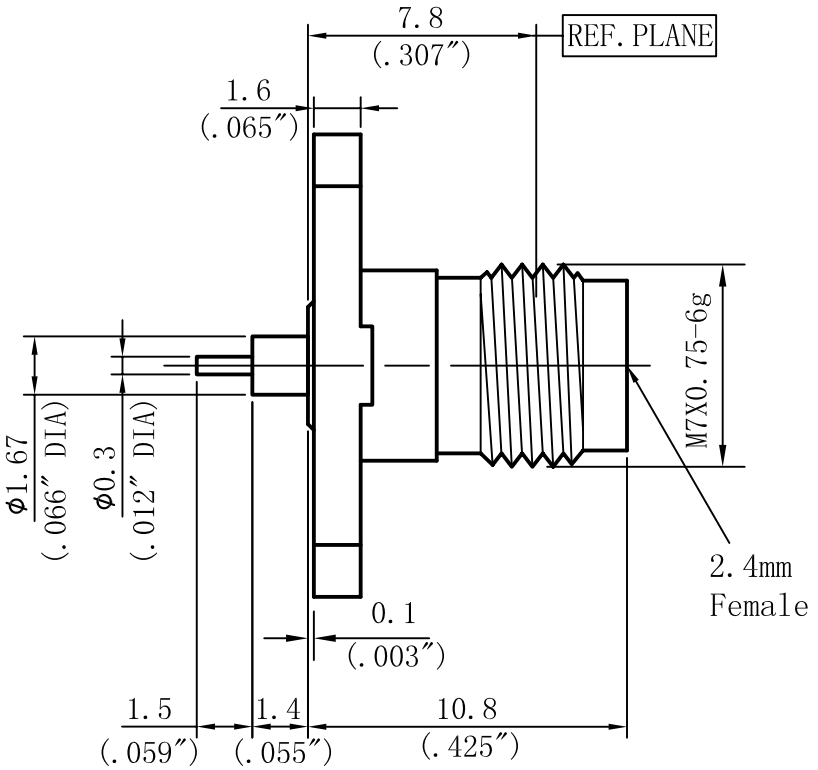


## Performance Features:

Nominal Impedance: 50Ω
Frequency Range: DC-50GHz

## Materials/Finishes:

Housing: SU303F
Polished & Passivated
Center Contact: Beryllium Copper
Gold Plated
Insulators: PEI&PTFE

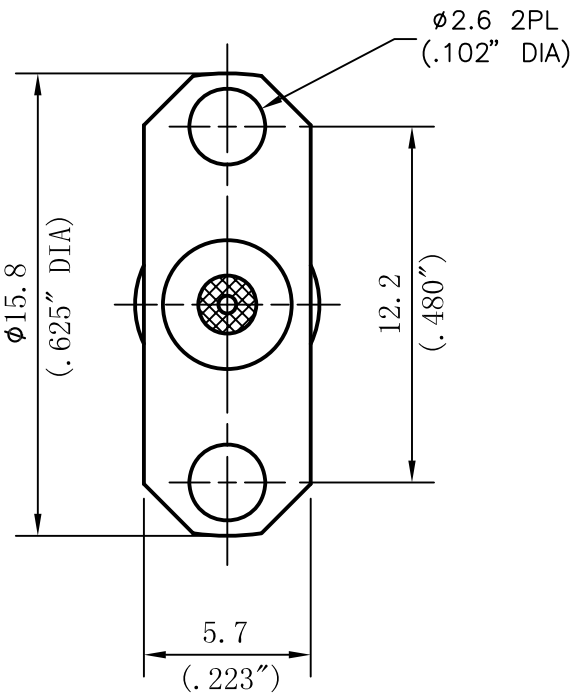MicrowaveTown Company, LLC
1283 E. Route 66 Ave.
Glendora, CA 91741
Tel:(626)241-9635
Fax:(626)698-1638
www.microwavetown.com

PROPRIETARY INFORMATION: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM MICROWAVETOWN

| LTR | DESCRIPTION | DATE | APPR. |
|---|---|---|---|
| | | | |
| | | | |
| | | | |

DIRECTION OF VIEW

UNIT: mm

| | |
|---|---|
| DRAWN | Shaoqing Du |
| CHECKED | Haimin Zhang |
| APPR. | Gang Cao |

UNLESS OTHERWISE SPECIFIDE
1. REMOVE ALL BURRS, BREAK ALL CORNERS, SHARP EDGES 0.05 R MAX
2. LINEARITY TOLERANCES ±0.1, ANGLE TOLERANCES ±1°
3. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN 0.1
4. ALL DIMENSIONS ARE AFTER PLATING. SURFACE FINISHED

DO NOT SCALE DRAWING

TITLE: 2.4mm Connector

DWG NO.: D370P0403F04

OUTLINE DRAWING

| SIZE | SCALE | REV. | SHEET |
|---|---|---|---|
| A4_h | 4:1 | V2.0 | 1/1 |