


1 2 3 4 5 6

A

B

C

D

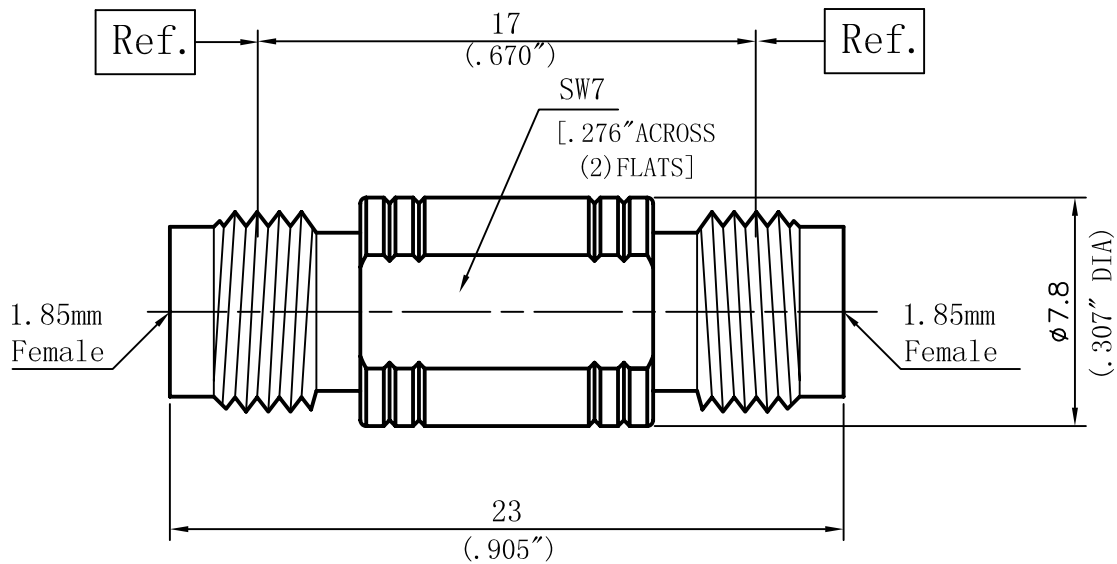


**Performance Features:**

Nominal Impedance: 50Ω  
 Frequency Range: DC-65GHz  
 VSWR: DC-65GHz.... 1.25:1 (Max)

**Materials/Finishes:**

Housing: SU303F  
 Polished & Passivated  
 Center Contact: Beryllium Copper  
 Gold Plated  
 Insulators: PEI

**MicrowaveTown**  
 www.MicrowaveTown.com



UNIT  
 mm

TITLE  
**1.85mm Adapter**

PROPRIETARY INFORMATION: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM MICROWAVETOWN

DRAWN	Shaoqing Du
CHECKED	Haimin Zhang
APPR.	Gang Cao

DWG NO.  
**Z383800Z01**

UNLESS OTHERWISE SPECIFIED:  
 1. REMOVE ALL BURRS, BREAK ALL CORNERS, SHARP EDGES 0.05 R MAX  
 2. LINEARITY TOLERANCES ±0.1; ANGLE TOLERANCES ±1°  
 3. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN 0.1  
 4. ALL DIMENSIONS ARE AFTER PLATING, SURFACE FINISHED

**OUTLINE DRAWING**

LTR	DESCRIPTION	DATE	APPR.	DO NOT SCALE DRAWING	SIZE A4_h 5	SCALE 4: 1	REV. V2.0 6	SHEET 1/1
-----	-------------	------	-------	----------------------	-------------	------------	-------------	-----------